




OSS Virtual Managers

Keeping an Eye Out For You!

PO Box 248 Lawrence, KS 66044

785-843-LYNN
www.lynnsecurity.com
email: rkruse@lynnelectric.com

VIRTUAL MANAGER DIGITAL VIDEO RECORDING SYSTEMS

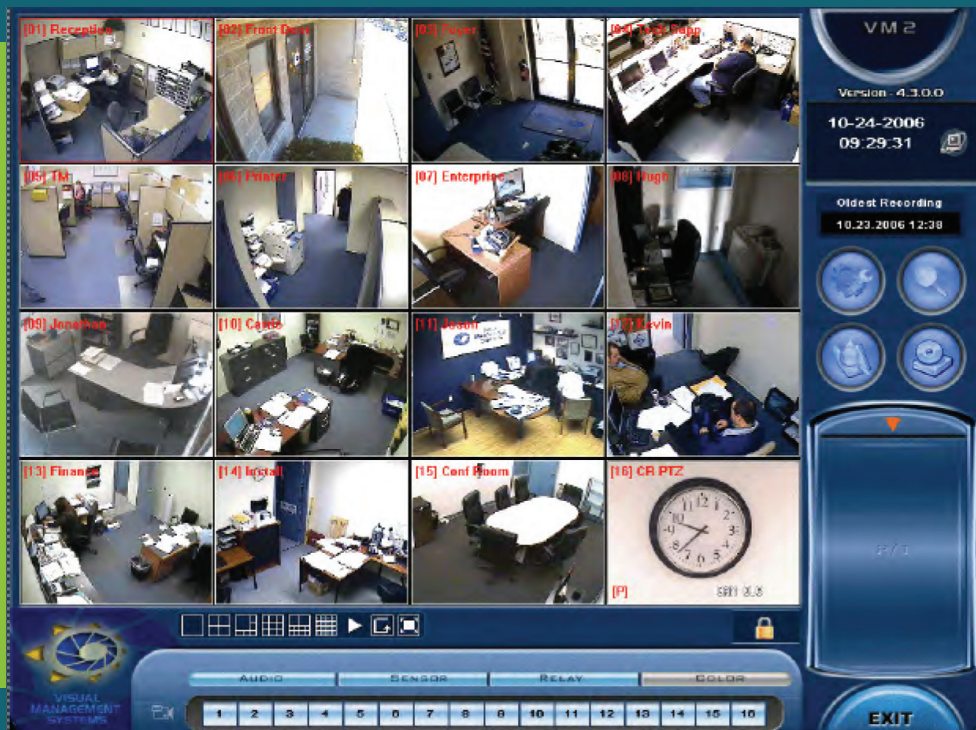

VIRTUAL MANAGER DIGITAL VIDEO RECORDING SYSTEMS OFFER ALL OF THE FOLLOWING FEATURES AND MORE:

- Time-lapse and/or Real-time Recording and Viewing Capabilities
- CIF-Quality Recording with MPEG4 Compression
- Built-in Motion Triggered Recording
- Flexible Camera Settings Offer Multiple Storage Options
- Multi-Monitor Outputs for DVR Multi-Tasking
- Up to 16 channels of Audio Input for Local and Remote Monitoring and Recording
- Encrypted/Watermarked Recordings with built-in Verification Tools
- Video Alarm Outputs with Notification
- MADE IN THE UNITED STATES FROM THE FINEST AVAILABLE COMPONENTS

Get Lynn On The Line.

785.843.LYNN • www.lynnsecurity.com



Video Server System Specifications

	Silver	Gold	Platinum
Processor	P4 2.26 Ghz	P4 2.4 Ghz	P4 3.0 Ghz
Ram	256 MB DDR	512 MB DDR	1.02 GB DDR
VGA Video	256 bit integrated SiS	128 MB ATi 9250	128 MB ATi 9250
Dual Monitor		yes	
DVI Output		yes	
S Video Output		yes	
Composite Out		Single Channel Switching	
Audio	1 Channel	4 Channels	4-16 Channels
Screen Split	Live/Remote/Record	Live/Remote/Record	Live/Remote/Record
Resolution (selectable)	1, 4	1, 4, 6, 9, 16	1, 4, 6, 9, 10, 16
Viewing Frame Rate	320 x 240, 640 x 480	320 x 240, 640 x 480 60	320 x 240, 640 x 480 30 120
Recording Frame Rate	30 FPS/4ch	120 FPS/4ch	FPS/4ch, 480FPS/16ch
Codec (selectable)	MPEG4, MJPEG, H.263	MPEG4, MJPEG, H.263	MPEG4, MJPEG, H.263
PTZ Control	RS 422/485 Interface (optional)		RS 422/485 Interface
Alarm Inputs/Outputs	16 Dry Contact Inputs		16 Dry Conact Inputs/4 Relay

Remote Management Software Specifications

	Silver	Gold	Platinum
Remote Camera Views		4ch 1, 4 or 16ch 1, 4, 9, 16	
Resolution (selectable)		320 x 240, 480 x 360, 640 x 480	
Compression (selectable)		MPEG4, MJPEG, H.263	
Communication (selectable)	TCP/IP, LAN, WAN, Internet, Dial-up, PSTN (POTS)		
Multi-Server Remote	Up to 16 servers simultaneously, TCP/IP Only		
Remote Search	Single Channel, Speed Adjustable, Multi-Size		

Recorder/Playback Specifications

	Silver	Gold	Platinum
Record and Playback Speed		P4 2.26 Ghz	
Image Compression Frame File Size	320 x 240, =<1KB-5KB, 640 x 480<2KB-15KB w/MPEG4 Compression		
Recorded Video Streams	Up to 16 Cameras, selectable and simultaneous		
Local Playback	Up to 16 Cameras, selectable and simultaneous		
Motion Triggered Recording	Yes, selectable per camera, per hour		
Continuour Recording	Yes, selectable per camera, per hour		
Alarm Triggered Recording	Yes, selectable per camera, per hour		
Watch Mode (non-recorkding)	Yes, selectable per camera, per hour		
Combination Recording	Yes, selectable per camera, per hour		